

Product datasheet

Specifications



Data socket, New Unica, mechanism, RJ45 Cat5E, U/UTP, straight, click, shuttered, beige

NU341044

Main

Range	New Unica
Product Or Component Type	Data socket
Device Application	Communication
Device Presentation	Mechanism
Colour Tint	Beige (RAL 1013)
Data Socket Type	RJ45 8 contact(s) Cat.5e < 155 MHz
Provided Equipment	Label holder Protective flap

Complementary

Communication Network Type	1000BASE-T
Communication Port Protocol	ATM 155 Mbps
Number Of Modules	1 module
Socket Number	1
Type Of Footprint	Infraplus
Connector Type	S-One
Cable Shielding Type	U/UTP
Organization Of Wire	Unshielded twisted pair
Connections - Terminals	Click
Device Mounting	Flush
Fixing Mode	Clip-in
Installation Direction	Straight
Material	Thermoplastic ABS-UV stabilised: central plate
Depth	40.5 mm
Width	22.5 mm
Height	45 mm
Embedding Depth	40.5 mm

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Resistance To Chemical Agents	Resistant to alcohol (70 %) Resistant to alcohol (96 %) Resistant to A-Lactic Acid Resistant to diluted quaternary ammonium Resistant to diluted bleach Resistant to diluted ammonia Resistant to soapy water Resistant to crystal cleaner Resistant to hydrogen peroxide 10 volumes Resistant to hexane
--------------------------------------	---

Environment

Ip Degree Of Protection	IP20
Ik Degree Of Protection	IK01
Ambient Air Temperature For Operation	-25...55 °C
Ambient Air Temperature For Storage	-25...55 °C

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.3 cm
Package 1 Width	4.0 cm
Package 1 Length	4.5 cm
Package 1 Weight	14.0 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	50
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	1.015 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	800
Package 3 Height	77.0 cm
Package 3 Width	80.0 cm
Package 3 Length	60.0 cm
Package 3 Weight	24.74 kg

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

Reach Free Of Svhc

Toxic Heavy Metal Free

Mercury Free

Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Compliant

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)

Environmental Disclosure




[Product Environmental Profile](#)

Circularity Profile

No need of specific recycling operations

Technical illustration

Wiring diagram

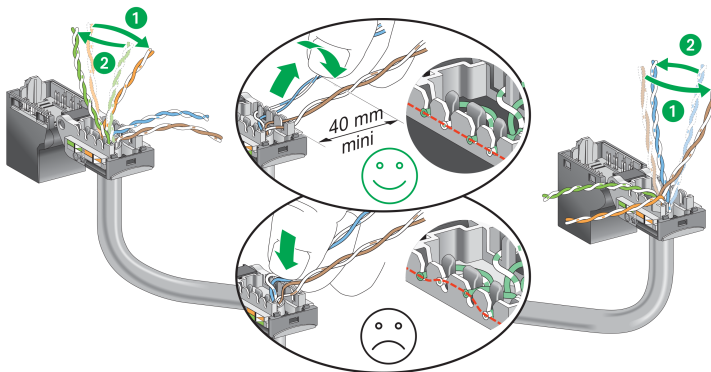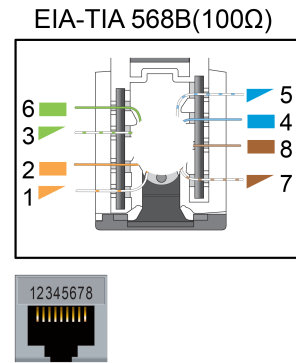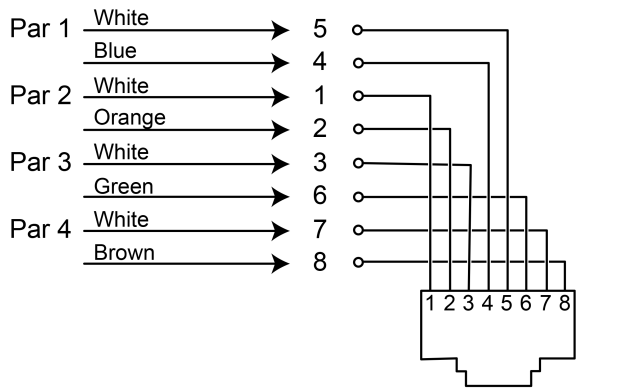

⚠ ⚠ DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

The product must be installed and connected by a qualified electrician.
 A qualified electrician must demonstrate an in-depth knowledge of:

- Construction of electrical installations in buildings in accordance with IEC 60364
- Additional safety standards, local connection rules, and building regulations
- Standardized tools and measuring equipment

Failure to follow these instructions will result in death or serious injury.