


# XCSTE5331

Safety switch, Telemecanique Safety switches XCS, plastic XCSTE, 1NC+1 NO, slow break, 1entry tapped Pg 11, 120 V

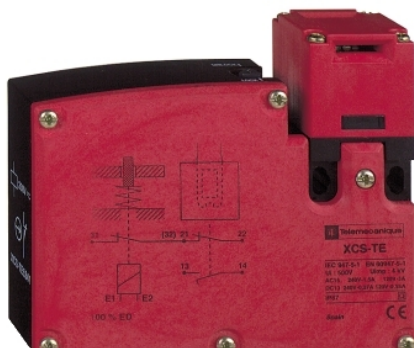

## Main

|  |  |
|--|--|
| Range of product   | Telemecanique Safety switches XCS  |
| Product or component type                                | Safety switch  |
| Component name   | XCSTE  |
| Design   | Rectangular  |
| Material   | Plastic  |
| Head type  | Key operated turret head   |
| Contacts type and composition                            | 1 NC + 1 NO  |
| Contact operation  | Slow-break, break before make  |
| Solenoid contacts type and composition                   | 1 NC (slow-break)  |
| Cable entry  | 1 entry tapped for Pg 11   |
| Electromagnet interlocking                               | Locking on de-energisation and unlocking on energisation of solenoid                     |
| [Us]&nbsp;solenoid&nbsp;rate&nbsp;of&nbsp;supply voltage | 230 V AC   |
| Cable outer diameter                                     | 7...10 mm  |
| Electrical connection                                    | Terminal, clamping capacity: 1 x 0.5...2 x 1.5 mm <sup>2</sup> with or without cable end |
| Number of poles  | 2  |
| Locking options description                              | With interlocking, locking by solenoid   |

## Complementary

|  |  |
|--|--|
| Insulation                                   | Double insulated   |
| Positive opening                             | With NC contact  |
| Supply voltage type                          | AC/DC  |
| Supply frequency                             | 50/60 Hz   |
| Load factor                                  | 1  |
| Power consumption in VA                      | 10 VA  |
| Mechanical durability                        | 1000000 cycles   |
| Positive opening minimum force               | 15 N   |
| Minimum actuation speed                      | 0.01 m/s   |
| Maximum actuation speed                      | 0.5 m/s  |
| [Ie] rated operational current               | 0.55 A at 125 V, DC-13, Q300 conforming to EN/IEC 60947-5-1<br>0.27 A at 250 V, DC-13, Q300 conforming to EN/IEC 60947-5-1<br>3 A at 120 V, AC-15, B300 conforming to EN/IEC 60947-5-1<br>1.5 A at 240 V, AC-15, B300 conforming to EN/IEC 60947-5-1 |
| [Ithe] conventional enclosed thermal current | 6 A  |
| [Ui] rated insulation voltage                | 300 V conforming to UL 508<br>500 V conforming to EN/IEC 60947-1<br>300 V conforming to CSA C22.2 No 14  |
| [Uimp] rated impulse withstand voltage       | 6 kV conforming to EN/IEC 60947-5-1  |
| Short-circuit protection                     | 10 A cartridge fuse type gG (gl)   |
| Actuator forcible withdrawal rtc             | 500 N  |
| Maximum operating rate                       | 10 cyc/mn for maximum durability   |

|                         |   |
|-------------------------|---|
| Safety level            | Can reach category 4 with the appropriate monitoring system and correctly wired conforming to EN/ISO 13849-1<br>Can reach PL = e with the appropriate monitoring system and correctly wired conforming to EN/ISO 13849-1<br>Can reach SIL 3 with the appropriate monitoring system and correctly wired conforming to EN/IEC 61508 |
| Safety reliability data | B10d = 5000000 value given for a life time of 20 years limited by mechanical or contact wear  |
| Body material           | PA (polyamide)  |
| Head material           | PA (polyamide)  |
| Depth                   | 33 mm   |
| Height                  | 94 mm   |
| Width                   | 110 mm  |
| Net weight              | 0.36 kg   |

## Environment

|                                       |  |
|---------------------------------------|--|
| Standards                             | UL 508<br>EN/ISO 12100<br>EN 1088/ISO 14119<br>EN/IEC 60204-1<br>CSA C22.2 No 14<br>EN/IEC 60947-5-1 |
| Product certifications                | UL<br>CSA  |
| Protective treatment                  | TC   |
| Ambient air temperature for operation | -25...60 °C  |
| Ambient air temperature for storage   | -40...70 °C  |
| Vibration resistance                  | 5 gn (f= 10...500 Hz) conforming to IEC 60068-2-6  |
| Shock resistance                      | 10 gn for 11 ms conforming to IEC 60068-2-27   |
| Electrical shock protection class     | Class II conforming to EN/IEC 61140  |
| IP degree of protection               | IP67 conforming to EN/IEC 60529 and EN/IEC 60947-5-1   |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Height             | 4.0 cm   |
| Package 1 Width              | 11.1 cm  |
| Package 1 Length             | 11.5 cm  |
| Package 1 Weight             | 390.0 g  |
| Unit Type of Package 2       | S02      |
| Number of Units in Package 2 | 22       |
| Package 2 Height             | 15.0 cm  |
| Package 2 Width              | 30.0 cm  |
| Package 2 Length             | 40.0 cm  |
| Package 2 Weight             | 8.934 kg |

## Offer Sustainability

|  |   |
|--|---|
| Sustainable offer status                   | Green Premium product   |
| Environmental Disclosure                   | <a href="#">Product Environmental Profile</a>   |
| Circularity Profile                        | <a href="#">End of Life Information</a>   |
| California proposition 65                  | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| For all Reach Rohs enquiries contact us at | <a href="mailto:sustainability@tesensors.com">sustainability@tesensors.com</a>  |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|